
[illegible]

(mm)												
Size	L	H ₁	H	A	E	F	Flange JIS 10K FF					Weight (kg)
							d	D	C	t	n-h	
15A	142	170	398	200	155	191	15	95	70	12	4-15	16.2
20A	142	170	398	200	155	191	20	100	75	14	4-15	16.7
25A	152	175	404	226	156	195	25	125	90	14	4-19	21.6
32A	172	192	434	226	165	204	32	135	100	16	4-19	24.5
40A	192	192	434	226	165	204	40	140	105	16	4-19	25.0
50A	218	216	498	276	170	211	50	155	120	16	4-19	36.4
65A	278	251	552	352	185	228	65	175	140	18	4-19	64.7
80A	294	264	575	352	190	239	80	185	150	18	8-19	69.8
100A	330	321	658	401	215	256	100	210	175	18	8-19	107.9

S p e c i f i c a t i o n	
Fluid	
Inlet Press.	MPa
Reduced Press.	MPa
Temp.	℃
Voltage	V
Operation	
Flow Rate	

コンビネーションバルブ

Approval	H. Iwamoto
Check	M. Yoshida
Drawing	Y. Aoyama
Drawing No.	Y-785-2205-1A
Date	17 DEC.2012

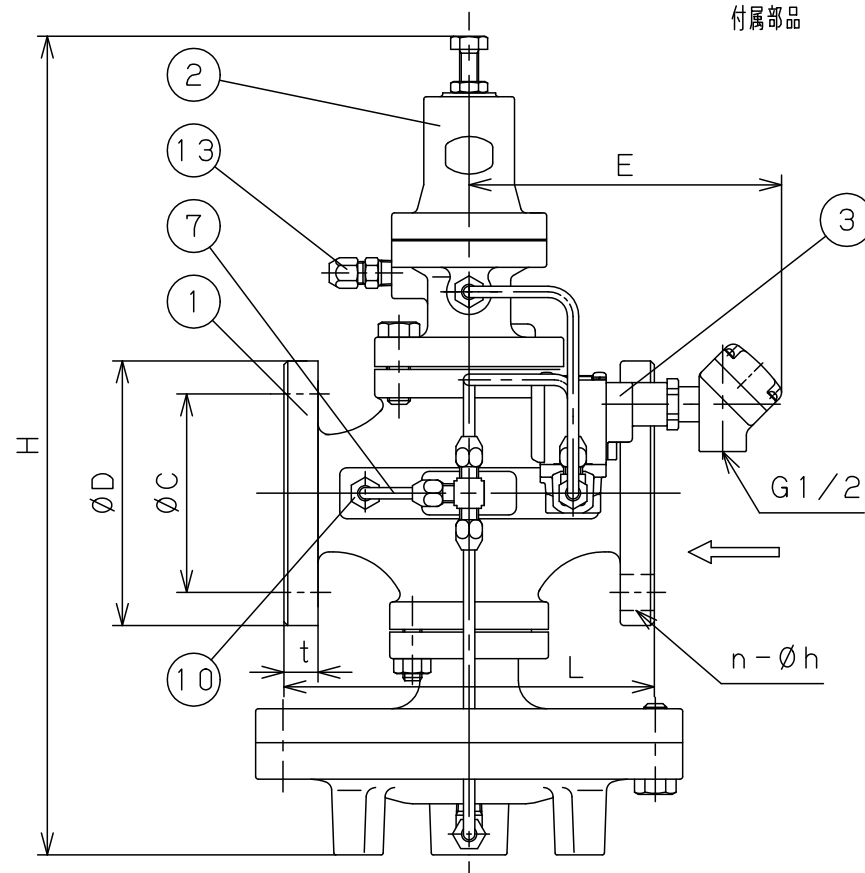